


TECHNICAL SPECIFICATIONS FRONTLINER FX6

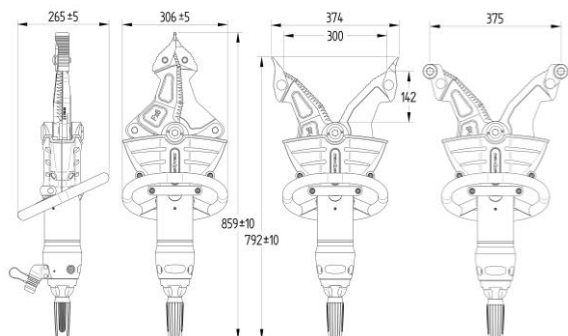

FRONTLINER FX6

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
Tailhose safety factor	-	8:1 (2,800 bar)
Dimensions (L x W x H)	859 x 306 x 265 mm	859 x 306 x 265 mm
Operational weight	19.3 kg	19.3 kg
Max. cutting opening	300 mm	300 mm
Reach	142 mm	142 mm
Max. cutting force	1,251 kN / 127.5 ton	1,251 kN / 127.5 ton
Max. spreading opening	374 mm	374 mm
Spreading force at base of jaw	57.2 – 176.3 kN / 5.8 – 17.8 ton	57.2 – 176.3 kN / 5.8 – 17.8 ton
Spreading force 25 mm from tips	39.5 – 81.6 kN / 4.0 – 8.3 ton	39.5 – 81.6 kN / 4.0 – 8.3 ton
Max. pulling opening	375 mm	375 mm
Pulling force	29.8 – 97.8 kN / 3.1 – 9.9 ton	29.8 – 97.8 kN / 3.1 – 9.9 ton
EN 13204	CK40-374H-19	CK40-374H-19
NFPA 1936	A8 B8 C7 D8 E8	A8 B8 C7 D8 E8

ACCESSORIES

Art. Nr.

LED light add-on	9500.1000
Chain & shackle set X4 & FX Series	2305.5000
Pulling Jaw FX6 (2 pcs)	2120.4280



**PRESSURE™
 ULTIMATE**



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002
E info@resqtec.com

F +31 (0)252 411794
W www.resqtec.com

RESQTEC®






CUTTING PERFORMANCE AS PER EN13204 TABLE 3 FOR CUTTERS AND COMBI TOOLS

DU007K00

Manufacturer	RESQTEC
Tool name and type	FX6 FRONTLINER COMBI-TOOL






CLAIMED CLASSIFICATION;

TYPE	CUTTER OPENING	CLASSIFICATION BASED ON MIN CUTTING PERFORMANCE	WEIGHT (1 decimal accurate)	CUTTING PERFORMANCE
CK	300	H	19.3	1H-2H-3H-4H-5H

PROFILE TYPE →	1 Round bar	2 Flat bar	3 Round tube	4 Square tube	5 Rectangular tube
CATEGORY LETTER ↓					
A	≥ 14	30 x 5	21,3 x 2,3		
B	≥ 16	40 x 5	26,4 x 2,3		
C	≥ 18	50 x 5	33,7 x 2,6	35 x 3	
D	≥ 20	60 x 5	42,6 x 2,6	40 x 4	50 x 25 x 2,5
E	≥ 22	80 x 8	48,3 x 2,9	45 x 4	50 x 30 x 3,0
F	≥ 24	80 x 10	60,3 x 2,9	50 x 4	60 x 40 x 3,0
G	≥ 26	100 x 10	76,1 x 3,2	55 x 4	80 x 40 x 3,0
H	≥ 28	110 x 10	76,1 x 4,0	60 x 4	80 x 40 x 4,0
I	≥ 32	120 x 10	88,9 x 4,0	60 x 5	80 x 40 x 5,0
J	≥ 36	130 x 10	88,9 x 5,0	70 x 4	100 x 50 x 4,0
K	≥ 40	140 x 10	101,6 x 4,0	70 x 5	100 x 50 x 5,0

CUTTING PERFORMANCE AS PER NFPA 1936 FOR CUTTERS AND COMBI TOOLS

A8 B8 C7 D8 E8

PROFILE TYPE →	A Round bar		B Flat bar		C Round pipe		D Square tube		E Angle iron	
PERFORMANCE LEVEL ↓										
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1	3/8	9.5	1/4 x 1/2	6.4 x 13.7	3/8 0.68 x 0.09	17.2 x 2.2	1/2 x 0.06	12.7 x 1.5	1/2 x 1/8	12.7 x 3.17
2	1/2	12.7	1/4 x 1	6.4 x 25.4	3/4 1.05 x 0.11	26.6 x 2.79	1 3/4 x 0.06	19.1 x 1.5	1 x 1/8	25.4 x 3.17
3	5/8	15.8	1/4 x 2	6.4 x 50.8	1 1.32 x 0.13	33.5 x 3.3	1 x 0.08	25.4 x 2	1 1/4 x 3/16	31.7 x 4.8
4	3/4	19.1	1/4 x 3	6.4 x 76.2	1 1/4 1.66 x 0.14	42.2 x 3.2	1 1/4 x 0.12	31.7 x 3	1 1/2 x 3/16	38.1 x 4.8
5	7/8	22.2	1/4 x 4	6.4 x 101.6	1 1/2 1.90 x 0.15	48.3 x 3.2	1 1/2 x 0.12	38.1 x 3	1 1/2 x 1/4	38.1 x 6.35
6	1	25.4	3/8 x 3	9.5 x 76.2	2 2.38 x 0.15	60.5 x 3.8	1 3/4 x 0.12	44.5 x 3	1 3/4 x 1/4	44.5 x 6.35
7	1 1/4	31.8	3/8 x 4	9.5 x 101.6	2 1/2 2.88 x 0.20	73.2 x 5.1	2 x 0.15	50.8 x 3.8	1 1/2 x 3/8	38.1 x 9.5
8	1 1/2	38.1	3/8 x 5	9.5 x 126	3 3.50 x 0.22	88.9 x 5.6	2 1/2 x 0.19	63.5 x 4.6	2 x 3/8	50.8 x 9.5
9	1 3/4	44.45	3/8 x 6	9.5 x 152.4	3 1/2 4.00 x 0.23	101.6 x 5.8	3 x 0.19	76.2 x 4.8	2 1/2 x 3/8	63.5 x 9.5