


TECHNICAL SPECIFICATIONS

2.2kW 220V MTO

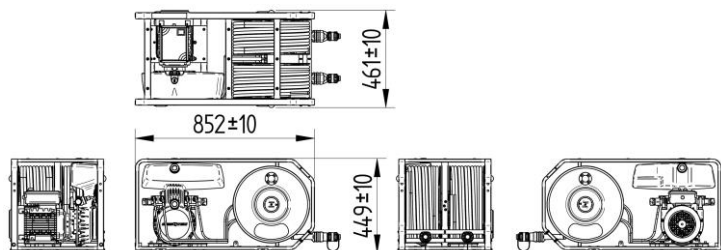

2.2kW 220V 50Hz MTO 3SR IHR 2x20M MAXI

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
EN-13204 designation	MTO	MTO
+SMART auto speed regulator with manual override	No	No
Running time	∞	∞
Engine / power supply	2.2kW 220V 50Hz Electric motor	2.2kW 220V 50Hz Electric motor
Noise level at 1 meter distance (EN-13204)	Lpa 75 dB	Lpa 75 dB
NFPA emission sound level at 4 meter distance	Not applicable	Not applicable
Dimensions (L x W x H)	461 x 852 x 437 mm (±10 mm)	461 x 985x 437 mm (±10 mm)
EN-13204 weight (ready use HF)	69.9 kg (±0.4 kg)	69.5 kg (±0.4 kg)
Dry shipping weight (with 4l HF in hoses)	65.5 kg (±0.4 kg)	65.1 kg (±0.4 kg)
Dry weight	61.9 kg (±0.4 kg)	61.5 kg (±0.4 kg)
Pump	3-stage radial piston	3-stage radial piston
Total hydraulic fluid capacity	4.9 liter	4.9 liter
Effective hydraulic fluid capacity	3.9 liter	3.9 liter
1st stage (0 – 120 bar)	2x 3,821 cc/min (3.8 l/min)	2x 3,821 cc/min (3.8 l/min)
2nd stage (120 – 220 bar)	2x 2,151 cc/min (2.2 l/min)	2x 2,151 cc/min (2.2 l/min)
3rd stage (220 – 350 bar)	2x 1,075 cc/min (1.1 l/min)	2x 1,075 cc/min (1.1 l/min)
Hoses	2x20m 5/16" TWIN (4:1 safety)	2x20m 5/16" TWIN (4:1 safety)

ACCESSORIES

Art Nr.

LED light add-on	9500.1000
Fold-O-Matic carry handle add-on set 4	3455.0504



ULTIMATE



EN-13204
COMPLIANT

neo1
TECHNOLOGY

Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002 F +31 (0)252 411794
 E info@resqtec.com W www.resqtec.com

RESQTEC®