


# TECHNICAL SPECIFICATIONS GX160 E-ST MTO

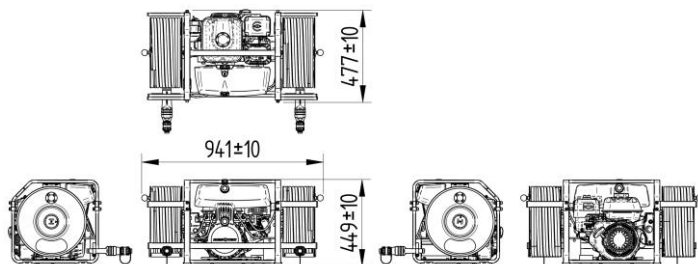

## GX160 E-START MTO 3SR SHR 2x20M MAXI

NEO1 

HP/FF 

|   |                                      |                                      |
|---|--------------------------------------|--------------------------------------|
| Nominal pressure                                      | UltimatePressure™ 350 bar            | UltimatePressure™ 350 bar            |
| EN-13204 designation                                  | MTO                                  | MTO                                  |
| +SMART auto speed regulator with manual override      | No                                   | No                                   |
| Electric start & manual recoil start                  | Yes                                  | Yes                                  |
| Running time  | Ca. 180 min                          | Ca. 180 min                          |
| Engine / power supply                                 | Honda 3.6kW (4.8 HP) 4-stroke petrol | Honda 3.6kW (4.8 HP) 4-stroke petrol |
| Fuel tank capacity                                    | 3.1 liter                            | 3.1 liter                            |
| Noise level at 1 meter distance (EN-13204)            | Lpa 86 dB                            | Lpa 86 dB                            |
| NFPA emission sound level at 4 meter distance         | Lpa 80 dB                            | Lpa 80 dB                            |
| Dimensions (L x W x H)                                | 477 x 941 x 449 mm (±10 mm)          | 477 x 941 x 449 mm (±10 mm)          |
| EN-13204 weight (ready use HF & fuel full)            | 72.8 kg (±0.4)                       | 72.4 kg (±0.4)                       |
| Weight with HF but no fuel                            | 71.0 kg (±0.4)                       | 70.6 kg (±0.4)                       |
| Dry shipping weight (with motor oil & 4l HF in hoses) | 66.6 kg (±0.4)                       | 66.2 kg (±0.4)                       |
| Dry weight (with motor oil)                           | 63.0 kg (±0.4)                       | 62.6 kg (±0.4)                       |
| Pump  | 3-stage radial piston                | 3-stage radial piston                |
| Total hydraulic fluid capacity                        | 4.9 liter                            | 4.9 liter                            |
| Effective hydraulic fluid capacity                    | 3.9 liter                            | 3.9 liter                            |
| 1st stage (0 – 120 bar)                               | 2x 5,883 cc/min (5.9 l/min)          | 2x 5,883 cc/min (5.9 l/min)          |
| 2nd stage (120 – 220 bar)                             | 2x 3,153 cc/min (3.2 l/min)          | 2x 3,153 cc/min (3.2 l/min)          |
| 3rd stage (220 – 350 bar)                             | 2x 1,235 cc/min (1.2 l/min)          | 2x 1,235 cc/min (1.2 l/min)          |
| Hoses   | 2x 20M 5/16" TWIN (4:1 safety)       | 2x 20M 5/16" TWIN (4:1 safety)       |

## ACCESSORIES

Art.Nr.

## ACCESSORIES

Art. Nr.

|  |           |
|--|-----------|
| LED light add-on                       | 9500.1000 |
| Fold-O-Matic carry handle add-on set 4 | 3455.0504 |
| H-GX160 Fuel level indicator add-on    | 3425.0265 |

|                               |           |
|-------------------------------|-----------|
| Elevation add-on 1,000-2,000m | 3437.1020 |
| Elevation add-on 2,000-3,000m | 3437.2030 |
| Elevation add-on 3,000-4,000m | 3437.3040 |
| Elevation add-on 4,000-5,000m | 3437.4050 |



ULTIMATE PRESSURE™



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.  
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002 F +31 (0)252 411794  
 E info@resqtec.com W www.resqtec.com

**RESQTEC**®