
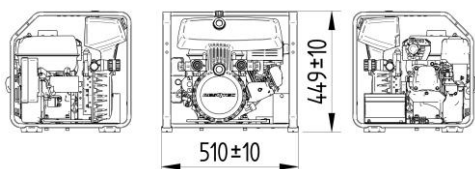


TECHNICAL SPECIFICATIONS GX160 E-ST MTO



GX160 E-START MTO 3SR STD MAXI

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
EN-13204 designation	MTO	MTO
+SMART auto speed regulator with manual override	No	No
Electric start & manual recoil start	Yes	Yes
Running time	Ca. 180 min	Ca. 180 min
Engine / power supply	Honda 3.6kW (4.8 HP) 4-stroke petrol	Honda 3.6kW (4.8 HP) 4-stroke petrol
Fuel tank capacity	3.1 liter	3.1 liter
Noise level at 1 meter distance (EN-13204)	Lpa 86 dB	Lpa 86 dB
NFPA emission sound level at 4 meter distance	Lpa 80 dB	Lpa 80 dB
Dimensions (L x W x H)	450 x 510 x 449 mm (±10 mm)	450 x 510 x 449 mm (±10 mm)
EN-13204 weight (ready use HF & fuel full)	46.4 kg (±0.2 kg)	47.1 kg (±0.2 kg)
Weight with HF but no fuel	44.6 kg (±0.2 kg)	45.3 kg (±0.2 kg)
Dry shipping weight (with motor oil)	40.2 kg (±0.2 kg)	41.0 kg (±0.2 kg)
Empty weight	39.9 kg (±0.2 kg)	40.6 kg (±0.2 kg)
Pump	3-stage radial piston	3-stage radial piston
Total hydraulic fluid capacity	4.9 liter	4.9 liter
Effective hydraulic fluid capacity	3.9 liter	3.9 liter
1st stage (0 – 120 bar)	2x 5,883 cc/min (5.9 l/min)	2x 5,883 cc/min (5.9 l/min)
2nd stage (120 – 220 bar)	2x 3,153 cc/min (3.2 l/min)	2x 3,153 cc/min (3.2 l/min)
3rd stage (220 – 350 bar)	2x 1,235 cc/min (1.2 l/min)	2x 1,235 cc/min (1.2 l/min)

ACCESSORIES

Art. Nr.

ACCESSORIES

Art. Nr.

LED light add-on	9500.1000	Elevation add-on 1,000-2,000m	3437.1020
Fold-O-Matic carry handle add-on set 4	3455.0504	Elevation add-on 2,000-3,000m	3437.2030
H-GX160 Fuel level indicator add-on	3425.0265	Elevation add-on 3,000-4,000m	3437.3040
		Elevation add-on 4,000-5,000m	3437.4050



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002 **F** +31 (0)252 411794
E info@resqtec.com **W** www.resqtec.com

RESQTEC®