


# TECHNICAL SPECIFICATIONS

# RAM V4

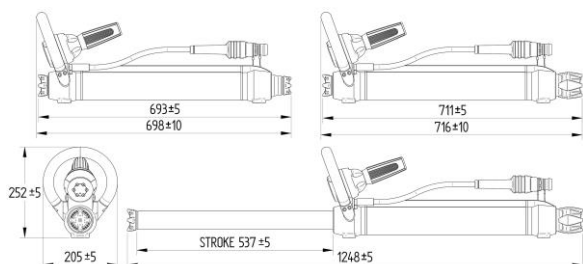

## RAM V4

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
Tailhose safety factor	8:1 (2,800 bar)	8:1 (2,800 bar)
Dimensions incl. add. detachable rear jaw (L x W x H)	711 x 205 x 252 mm	711 x 205 x 252 mm
Dimensions excl. add. detachable rear jaw (L x W x H)	693 x 205 x 252 mm	693 x 205 x 252 mm
Max. extended length incl. detachable rear jaw	1,248 mm	1,248 mm
Max. stroke (hydraulic stroke + added jaw)	537 + 18 mm	537 + 18 mm
Operational weight	14.3 kg (±0.2 kg)	14.4 kg (±0.2 kg)
Operational weight incl. add. detachable rear jaw	15.0 kg (±0.2 kg)	15.1 kg (±0.2 kg)
Max. spreading / pushing force	112 kN / 11.5 ton	112 kN / 11.5 ton
EN 13204	R112/537-14.3	R112/537-14.4
NFPA 1936	Compliant	Compliant

## ACCESSORIES

Art. Nr.

## ACCESORIES

Art. Nr.

LED light add-on	9500.1000	EX-150	8410.0500.20
Ram support	2350.0535	EX-300	8410.0510.20
Ram adapter	8420.0230	PX-M 600	8410.0520.20
Multiconnector fem-fem	8420.0260		
Crown	8420.0000		
Rhino	8420.0020		
Multiswivel	8420.3550		
Fixed base	8420.0300		



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



**RESQTEC Zumro B.V.**

Meer en Duin 82 | 2163 HC Lisse, the Netherlands

**T** +31 (0)252 419002

**E** info@resqtec.com

**F** +31 (0)252 411794

**W** www.resqtec.com

