


# TECHNICAL SPECIFICATIONS

# RAM V5T

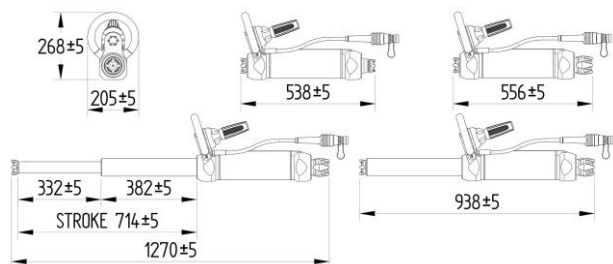

## RAM V5T

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
Tailhose safety factor	8:1 (2,800 bar)	8:1 (2,800 bar)
Dimensions incl. add. detachable rear jaw (L x W x H)	556 x 205 x 268mm	556 x 205 x 268mm
Dimensions excl. add. detachable rear jaw (L x W x H)	538 x 205 x 268 mm	538 x 205 x 268 mm
Max. extended length incl. add. detachable rear jaw	1,270 mm	1,270 mm
Max. Stroke (hydraulic stroke + added jaw)	714 + 18 mm	714 + 18 mm
Operational weight	18.7 kg (±0.2 kg)	18.8 kg (±0.2 kg)
Operational weight incl. add. detachable rear jaw	19.4 kg (±0.2 kg)	19.5 kg (±0.2 kg)
Max. spreading / pushing force (first stage)	203 kN / 20.7 ton	203 kN / 20.7 ton
Max. spreading / pushing force (second stage)	91 kN / 9.3 ton	91 kN / 9.3 ton
EN 13204	TR 203/382-91/332-18.7	TR 203/382-91/332-18.8
NFPA 1936	Compliant	Compliant

## ACCESSORIES

Art. Nr.

## ACCESSORIES

Art. Nr.

LED light add-on	9500.1000	EX-150	8410.0500.20
Ram support	2350.0535		
Crown	8420.0000		
Rhino	8420.0020		
Multiswivel	8420.3550		
Fixed base	8420.0300		



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



**RESQTEC Zumro B.V.**  
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

**T** +31 (0)252 419002 **F** +31 (0)252 411794  
**E** info@resqtec.com **W** www.resqtec.com

**RESQTEC®**