


TECHNICAL SPECIFICATIONS SPREADER X2 EDD

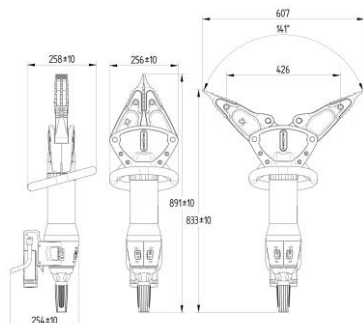

SPREADER X2 EDD

| | |
|---|---|
| Drive technology | Electronic Direct Drive (non hydraulic) |
| Nominal input | 43.2 VDC |
| Dimensions (L x W x H) | 891 x 256 x 258 mm (±10 mm) |
| Operational weight incl. Battery Pack 1 | 22.9 kg (±0.2 kg) |
| Operational weight incl. Power Connector | 22.3 kg (±0.2 kg) |
| Weight excl. battery | 21.9 kg (±0.2 kg) |
| Max. spreading opening | 607 mm |
| Spreading force at base of arm teeth ¹ | 105 - 342 kN / 10.7 - 34.9 ton |
| Spreading force at base of jaw | 67.6 - 173.2 kN / 6.9 - 17.7 ton |
| Spreading force 25 mm from tips | 38.4 - 83.2 kN / 3.9 - 8.5 ton |
| NFPA HSF | 76.7 kN / 7.8 ton |
| NFPA LSF | 34.7 kN / 3.5 ton |
| Max. pulling opening | 426 mm |
| Pulling force | 45.9 - 91.2 kN / 4.7- 9.3 ton |
| NFPA HPF | 59.6 kN / 6.1 ton |
| NFPA LPF | 27.4 kN / 2.8 ton |
| Squeezing force at base of arm teeth ¹ | 66.3 - 120.9 kN / 6.7 - 12.3 ton |
| NFPA 1936 | Compliant |

ACCESSORIES

Art. Nr.

ACCESSORIES

Art. Nr.

| | | | |
|------------------------------|-----------|-----------------|-----------|
| LED light add-on | 9500.1000 | Battery Pack 1 | 4300.0010 |
| X-series chain & shackle set | 2310.3000 | Battery Pack 10 | 4300.0390 |
| X-series aircraft jaws set | 2160.6125 | Power Connector | 4300.0150 |

¹Maximum is a theoretical force



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002
E info@resqtec.com

F +31 (0)252 411794
W www.resqtec.com

