


TECHNICAL SPECIFICATIONS

SPREADER X2

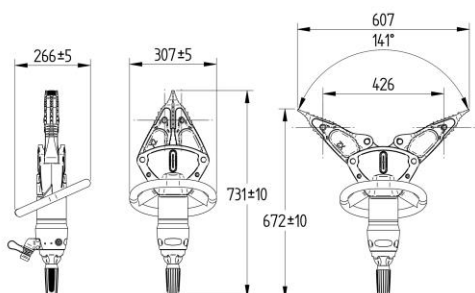

SPREADER X2

NEO1



HP/FF



Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
Tailhose safety factor	-	8:1 (2,800 bar)
Dimensions (L x W x H)	731 x 307 x 266 mm	731 x 307 x 266 mm
Operational weight	15.0 kg	16.1 kg
Max. spreading opening	607 mm	607 mm
Spreading force at base of arm teeth ¹	105 - 342 kN / 10.7 - 34.9 ton	105 - 342 kN / 10.7 - 34.9 ton
Spreading force at base of jaw	67.6 - 173.2 kN / 6.9 - 17.7 ton	67.6 - 173.2 kN / 6.9 - 17.7 ton
Spreading force 25 mm from tips	38.4 - 83.2 kN / 3.9 - 8.5 ton	38.4 - 83.2 kN / 3.9 - 8.5 ton
NFPA HSF	76.7 kN / 7.8 ton	76.7 kN / 7.8 ton
NFPA LSF	34.7 kN / 3.5 ton	34.7 kN / 3.5 ton
Max. pulling opening	426 mm	426 mm
Pulling force	45.9 - 91.2 kN / 4.7 - 9.3 ton	45.9 - 91.2 kN / 4.7 - 9.3 ton
NFPA HPF	59.6 kN / 6.1 ton	59.6 kN / 6.1 ton
NFPA LPF	27.4 kN / 2.8 ton	27.4 kN / 2.8 ton
Squeezing force at base of arm teeth ¹	66.3 - 120.9 kN / 6.7 - 12.3 ton	66.3 - 120.9 kN / 6.7 - 12.3 ton
EN 13204	AS38.4-607-15.0	AS38.4-607-16.1
NFPA 1936	Compliant	Compliant

ACCESSORIES

Art. Nr.

LED light add-on	9500.1000
X-series chain & shackle set	2310.3000
X-series aircraft jaws set	2160.6125

¹Maximum is a theoretical force that cannot be measured.

All forces with EN13204 certified power pack with pressure relief valves set conform EN13204 allowable pressure requirements



ULTIMATE



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.

Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002

E info@resqtec.com

F +31 (0)252 411794

W www.resqtec.com

RESQTEC®