


TECHNICAL SPECIFICATIONS SPREADER X6

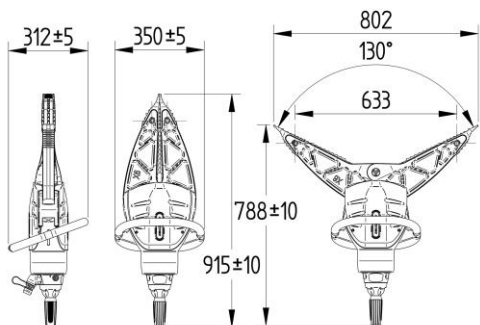

SPREADER X6

NEO1 

HP/FF 

Nominal pressure	UltimatePressure™ 350 bar	UltimatePressure™ 350 bar
Tailhose safety factor	-	8:1 (2,800 bar)
Dimensions (L x W x H)	915 x 350 x 312 mm	915 x 350 x 312 mm
Operational weight	25.5 kg	26.7 kg
Max. spreading opening	802 mm	802 mm
Spreading force at base of arm teeth ¹	109.0 – 2,273.8 kN / 11.1 - 231.9 ton	109.0 – 2,273.8 kN / 11.1 - 231.9 ton
Spreading force at base of jaw	77.7 - 172.0 kN / 7.9 - 17.5 ton	77.7 - 172.0 kN / 7.9 - 17.5 ton
Spreading force 25 mm from tips	60.4 - 87.4 kN / 6.2 - 8.9 ton	60.4 - 87.4 kN / 6.2 - 8.9 ton
NFPA HSF	80.9 kN / 8.3 ton	80.9 kN / 8.3 ton
NFPA LSF	57.0 kN / 5.8 ton	57.0 kN / 5.8 ton
Max. pulling opening	633 mm	633 mm
Pulling force	69.3 - 110.6 kN / 7.1 - 11.3 ton	69.3 - 110.6 kN / 7.1 - 11.3 ton
NFPA HPF	74.2 kN / 7.6 ton	74.2 kN / 7.6 ton
NFPA LPF	52.8 kN / 5.4 ton	52.8 kN / 5.4 ton
Squeezing force at base of arm teeth ¹	173.4 - 245.7 kN / 17.7 - 25.0 ton	173.4 - 245.7 kN / 17.7 - 25.0 ton
EN 13204	BS60.4-802-25.5	BS60.4-802-25.5
NFPA 1936	Compliant	Compliant

ACCESSORIES

Art. Nr.

LED light add-on	9500.1000
X-series chain & shackle set	2310.3000
X-series aircraft jaws set	2160.6125

¹Maximum is a theoretical force that cannot be measured.

All forces with EN13204 certified power pack with pressure relief valves set conform EN13204 allowable pressure requirements



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.



RESQTEC Zumro B.V.
 Meer en Duin 82 | 2163 HC Lisse, the Netherlands

T +31 (0)252 419002
E info@resqtec.com

F +31 (0)252 411794
W www.resqtec.com

RESQTEC®